

## Panel Composition:

100% Polyester (60% PET-Recycled Fiber, 40% PET-Virgin Fiber). Chemically hardened edges.

## Sizes:

Custom sizes available up to 48" X 120". Custom shape and design options also available.

## Finishes:

Select from approved panel fabrics. C.O.M. accepted after approval of suitability.

## Mounting Methods:

Adhesive & Finish Nail, Z-Clips, Edge Clips, Hook & Loop

## Fire Rating:

All panel components meet or exceed Class "A"\* requirements as determined by ASTM E-84 Tunnel Test.

## Warranty:


All products are warranted against workmanship and manufacturing defects for two (2) years from date of purchase.

EcoAbsorb™ is a High Impact Resilient core produced from 100% Polyester material that can be used in place of traditional cores commonly utilized in Acoustical and Tackable panel systems.

EcoAbsorb™ contains 60% Post Consumer recycled content which may contribute to LEED points.



## Edge Detail:

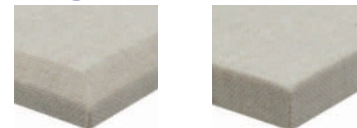

Bevel

Square

## FEATURES

- Formaldehyde Free
- No Binding Agents
- Consistent Color
- Does Not Promote Mildew
- Tackable
- Dust Free
- No Odor
- Extremely Resilient

Product #	Thickness	Absorption Coefficients				NRC
		250 Hz	500 Hz	1000 Hz	2000 Hz	
*ECO-050	1/2"	0.10	0.26	0.65	0.88	0.45
*ECO-100	1"	0.28	0.66	1.02	1.03	0.75
*ECO-150	1 1/2"	0.61	0.82	1.04	1.00	0.85
ECO-200	2"	0.79	1.05	1.12	0.99	1.00